

1/8

100

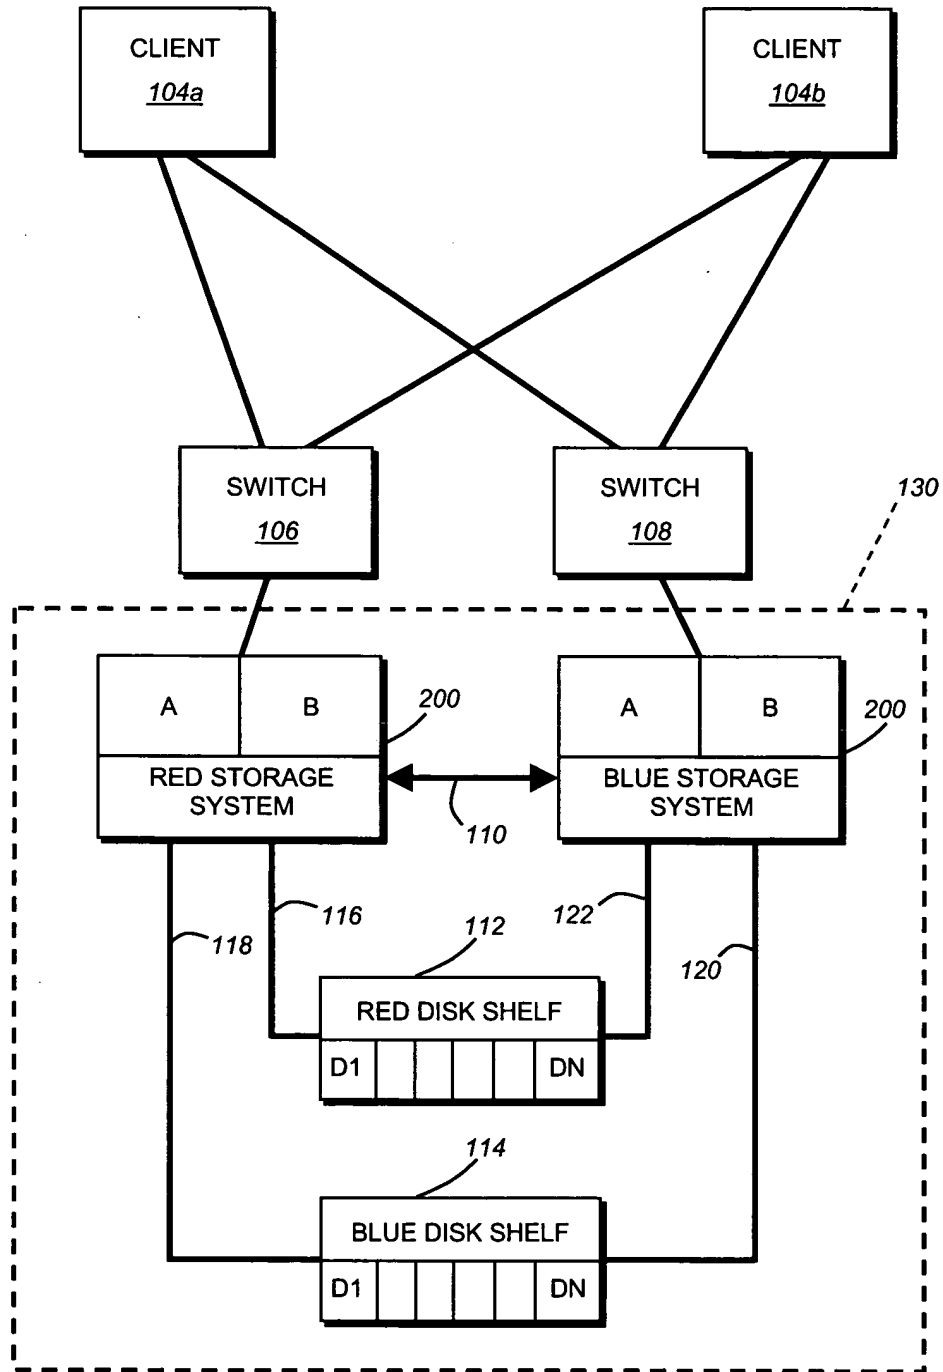


FIG. 1

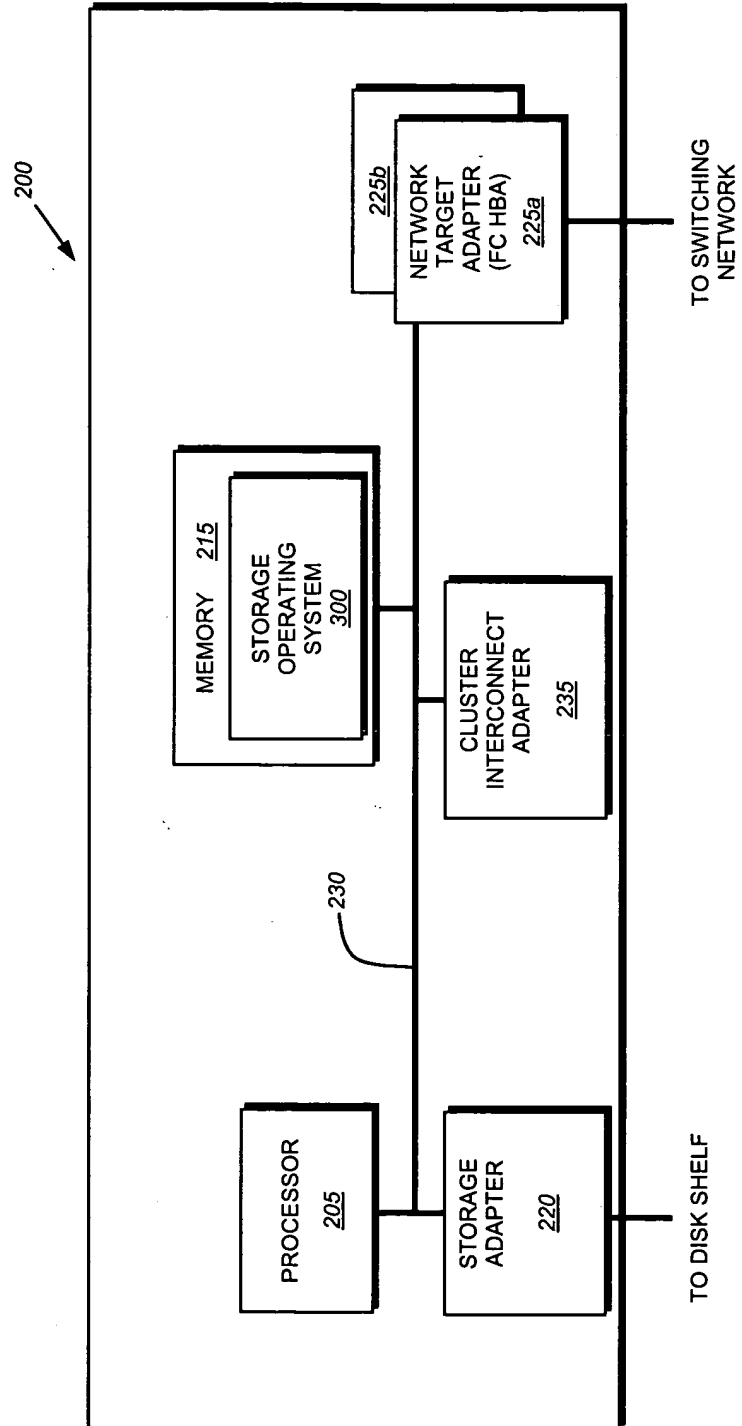


FIG. 2

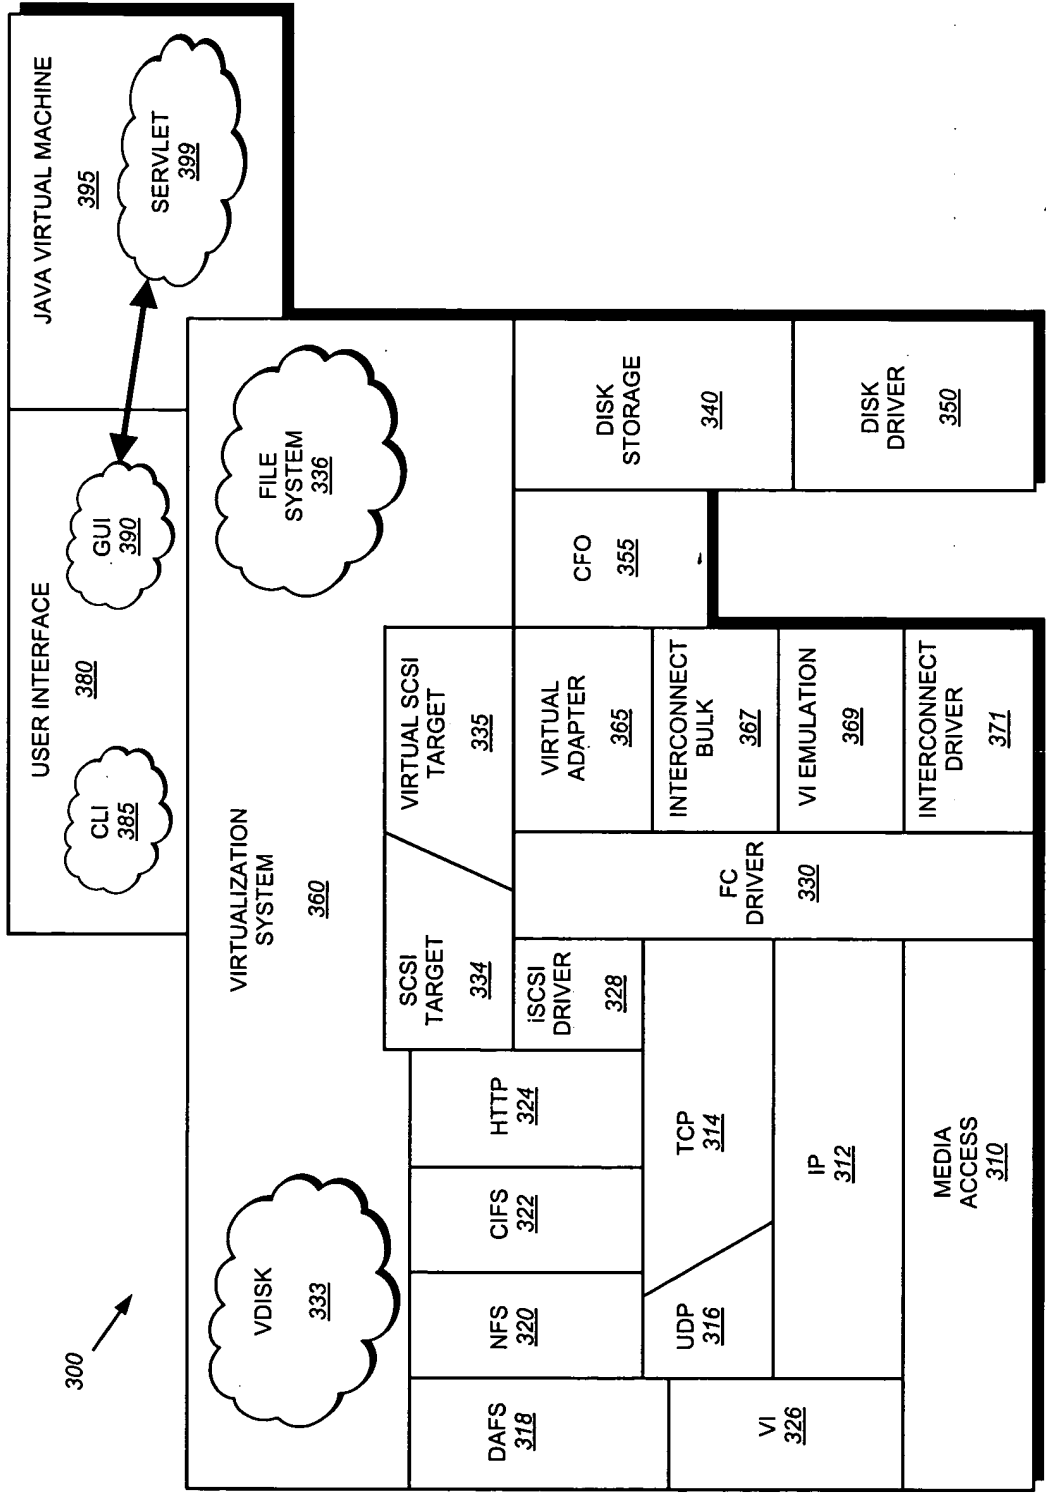


FIG. 3

4/8

| | |
|---------------------------|------------|
| ADAPTER MODE | <u>405</u> |
| NUMBER OF VIRTUAL PORTS | <u>410</u> |
| VIRTUAL PORT DATABASE [] | <u>500</u> |
| LOOP TO VP INDEX [] | <u>415</u> |
| • • • | <u>420</u> |

400
↙

FIG. 4

| | |
|-------------|------------|
| STATE | <u>505</u> |
| MODE | <u>510</u> |
| HOST | <u>515</u> |
| NODE NAME | <u>520</u> |
| PORT NAME | <u>525</u> |
| LOOP ID | <u>530</u> |
| DEVICE ID | <u>535</u> |
| • • • | <u>540</u> |

500
↙

FIG. 5


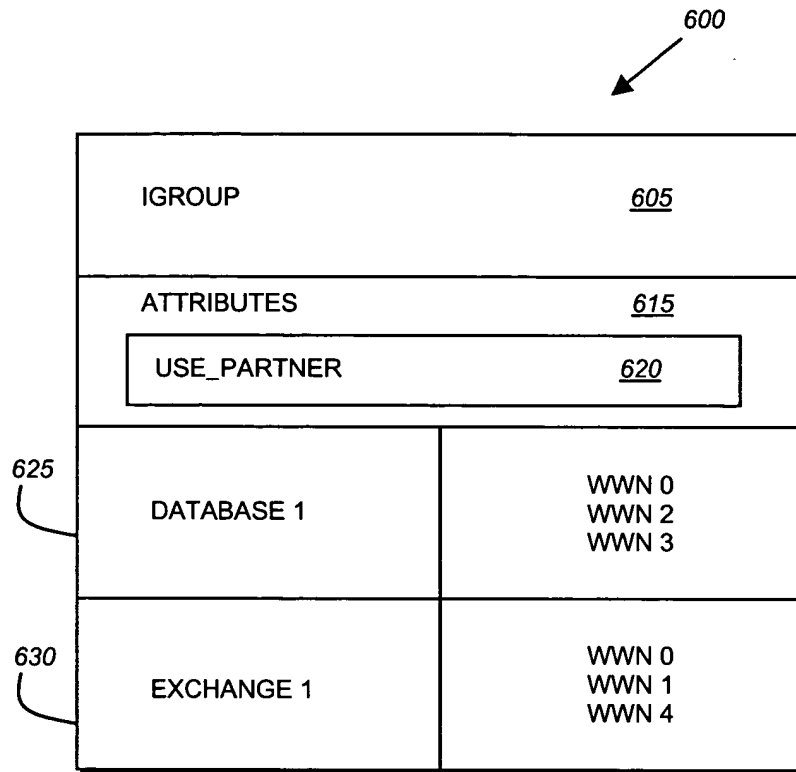


FIG. 6

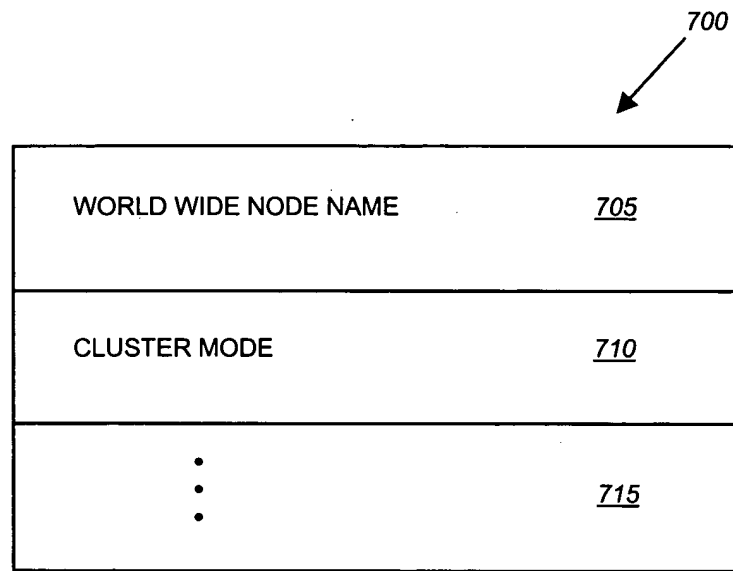

700

| | |
|----------------------|------------|
| WORLD WIDE NODE NAME | <u>705</u> |
| CLUSTER MODE | <u>710</u> |
| ⋮ | <u>715</u> |

FIG. 7

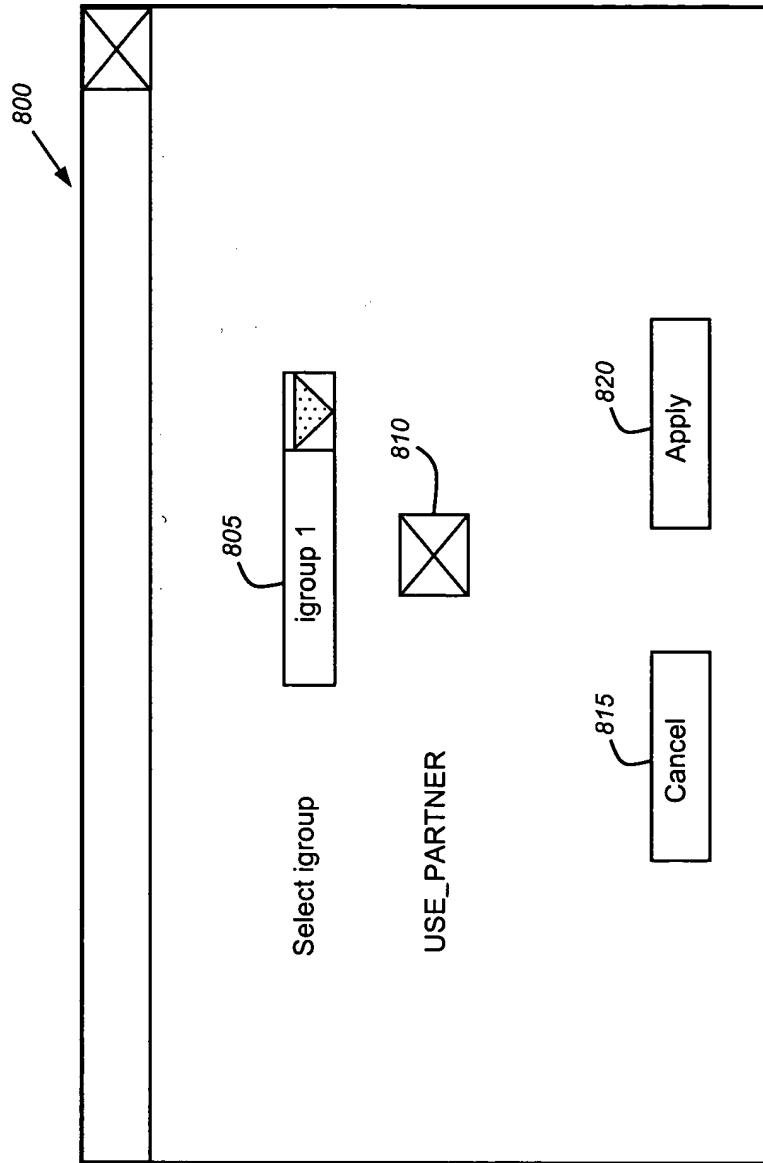


FIG. 8

900

Set Cluster Mode

☐ Partner 905

☐ Standby 910

☐ Mixed 915

Cancel 920

Apply 925

FIG. 9